

WIN 500 (S/NP) Standard Features

Lateral paper feed – Landscape format

Feeding system – Automatic vacuum feed with 14 suction feet

Sheet Fed with option of feeding one sheet of paper as machine rotates two cycles

Roller-to-Roller pull guide

Micro-adjustments on will running

Double Spring action grippers ideal for large solids

Chrome plated cylinders

Stainless water fountain roller

Molletin/ Standard and Kompac/Optional*

Static electricity eliminator

Powder spray device

Inverter controlled motor – PLC device

S - option is a second color head


NP – advanced swing away device can do numbering, lateral and vertical perforating

NP - can do word and signature imprinting with resin plate

Specifications

	MM	Inches
Max. Paper	500 x 365	19.69 x 14.37
Min. Paper	90 x 140	3.54 x 5.41
Paper Thickness	0.04 - 0.3	0.001lb – 0.012lb
Printing Speed	3000 – 9000	3000 – 9000
Printing Speed	when numbering or perforating 6500 maximum	
Max. Plate Size	490 X 395	19.29 X 15.55
Feeding System	Pneumatic feeding with 14 suckers	
Delivery System	Chain Delivery	
Number of Rollers	14	
Dampening System	Molletin/Standard	Kompac/Optional

Specifications subject to change without notice – rev.09.04

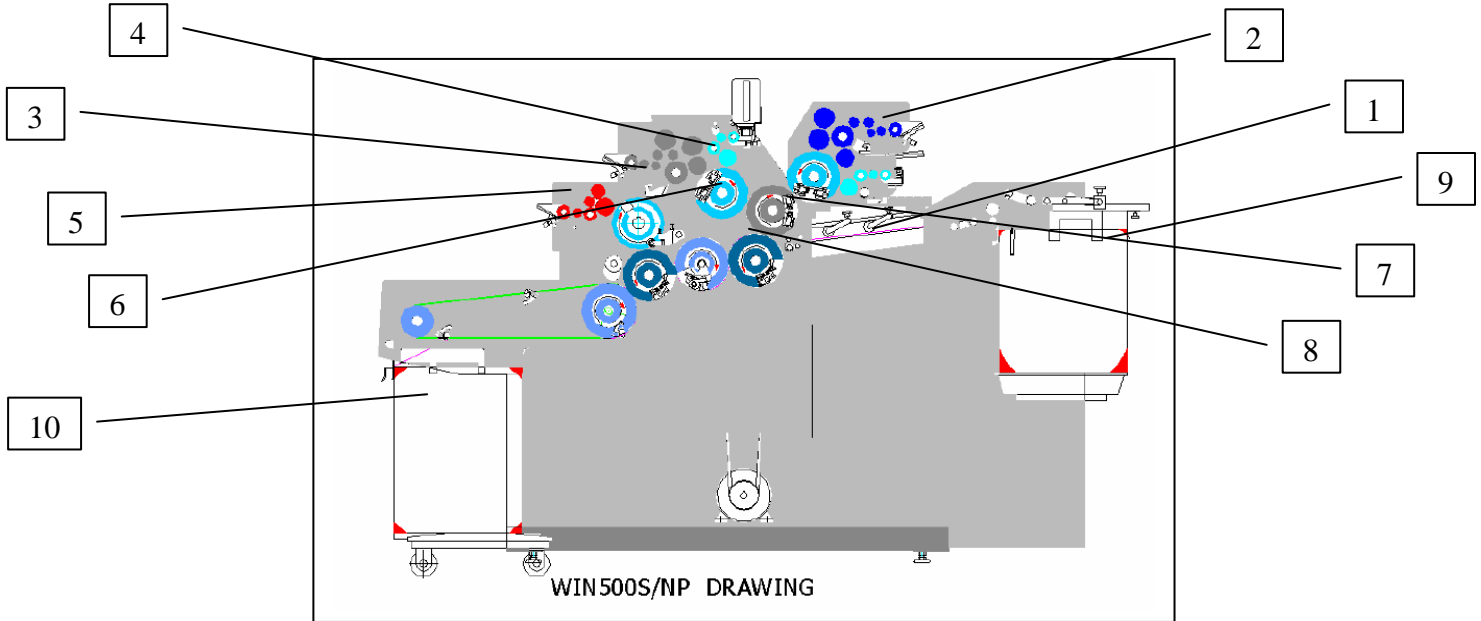

- | | |
|-----------------------------------|------------------------|
| 1. Infeed | 6. Plate Cylinder |
| 2. Roll out Second print head | 7. Blanket Cylinder |
| 3. Inking Unit | 8. Impression Cylinder |
| 4. Dampening unit | 9. Feeder |
| 5. Numbering and Perforating Unit | 10. Delivery |